



RECESSED SPOTLIGHT
4.0026

EXTERIOR

IP67



- › Mounting spotlight for standard mounting boxes
- › Up to 495 lumen light intensity
- › Large light emission of \varnothing 50 mm



4.0026 | 4.0025 | RECESSED SPOTLIGHT

FOR ILLUMINATION AND ORIENTATION FOR FACADES, TERRACE, WAYS AND GARDENS.



- Protection system IP67
- cover made of stainless steel 316Ti
- Housing made of anodised aluminium
- Round or square attachment cover, height 3mm
- Toughened safety glass (ESG) – withstands loads of up to 650 kg
- ...
- POW-LED cold white, warm white, neutral white
- POW-LED colored
- POW-LED RGB
- operating mode: constant current
- ...
- For floor installation with a plastic installation container
- Supplied with plastic installation container and 3 m of connecting cable




RECESSED SPOTLIGHT 4.0026

EXTERIOR

IP67



Installation container

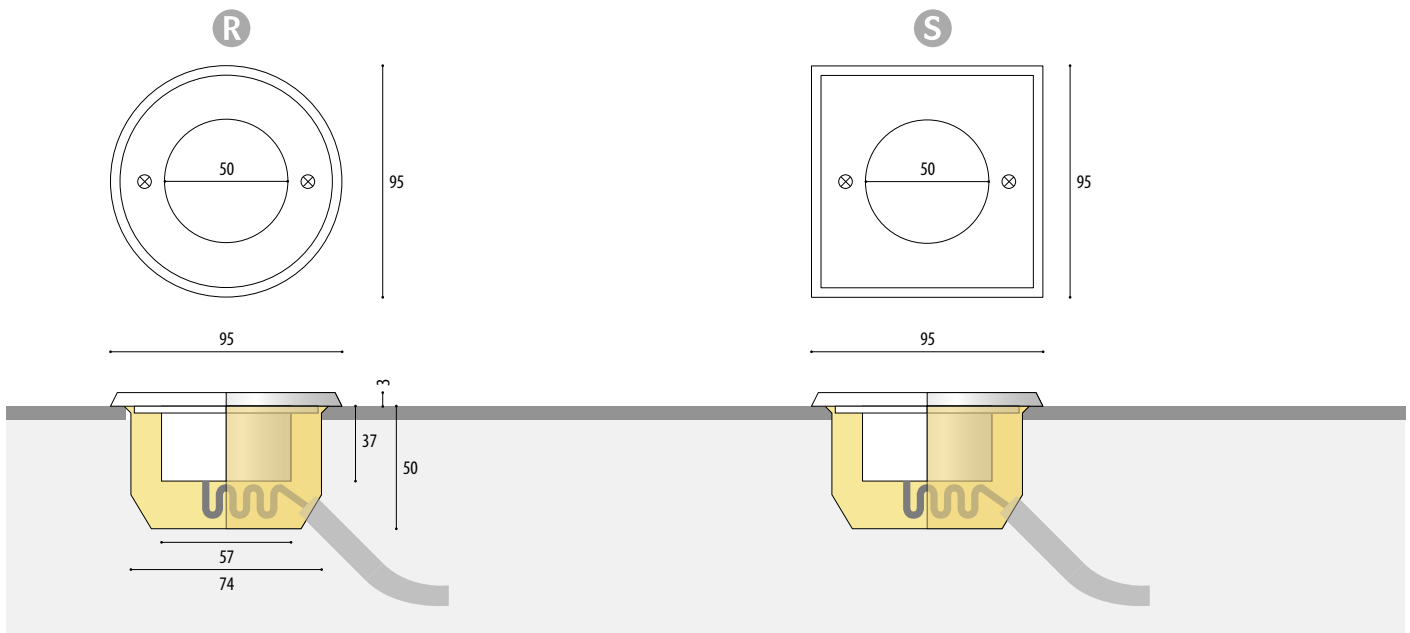

R	S	Article number	Article number	Lamps	Lumen	Light colour	Wattage	Current	Temperature	Radiation angle	Cable, installs	[V]
RADATION ANGLE 10° (SPOT)												
		4.0026.20.01	4.0026.40.01	3 POW-LED	495 lm	6000K cold white	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	V32
		4.0026.20.02	4.0026.40.02	3 POW-LED	405 lm	3000K warm white	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.03	4.0026.40.03	3 POW-LED	465 lm	4500K neutral white	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.04	4.0026.40.04	3 POW-LED		yellow	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.05	4.0026.40.05	3 POW-LED		red	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.06	4.0026.40.06	3 POW-LED		blue	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.07	4.0026.40.07	3 POW-LED		green	total 5 W	CC 350 mA	<40°C	10° spot	UW, 2x0,5 qmm	
		4.0026.20.09	4.0026.40.09	3 POW-LED		RGB	all on 5 W	CC 350 mA	<40°C	10° spot	UW, 6x0,5 qmm	
RADATION ANGLE 30° (MEDIUM)												
		4.0026.20.11	4.0026.40.11	3 POW-LED	495 lm	6000K cold white	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	V33
		4.0026.20.12	4.0026.40.12	3 POW-LED	405 lm	3000K warm white	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.13	4.0026.40.13	3 POW-LED	465 lm	4500K neutral white	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.14	4.0026.40.14	3 POW-LED		yellow	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.15	4.0026.40.15	3 POW-LED		red	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.16	4.0026.40.16	3 POW-LED		blue	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.17	4.0026.40.17	3 POW-LED		green	total 5 W	CC 350 mA	<40°C	30° medium	UW, 2x0,5 qmm	
		4.0026.20.19	4.0026.40.19	3 POW-LED		RGB	all on 5 W	CC 350 mA	<40°C	30° medium	UW, 6x0,5 qmm	
RADATION ANGLE HOMOGEN DIFFUS												
		4.0025.20.11	4.0025.40.11	1 POW-LED	165 lm	6000K cold white	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.12	4.0025.40.12	1 POW-LED	135 lm	3000K warm white	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.13	4.0025.40.13	1 POW-LED	155 lm	4500K neutral white	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.14	4.0025.40.14	1 POW-LED		yellow	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.15	4.0025.40.15	1 POW-LED		red	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.16	4.0025.40.16	1 POW-LED		blue	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.17	4.0025.40.17	1 POW-LED		green	total 2 W	CC 350 mA	<40°C	homogen diffus	UW, 2x0,5 qmm	
		4.0025.20.19	4.0025.40.19	1 Multichip POW-LED		RGB	all on 5 W	CC 350 mA	<40°C	diffus	UW, 6x0,5 qmm	



RECESSED SPOTLIGHT 4.0026



IP67

EXTERIOR

5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.09.16	5.0635.09.50	5.0635.65.20

Constant Current power supply, max 1 spotlights
 Constant Current power supply, max 2 spotlights
 Constant Current power supply, 2-4 spotlights
 RGB-Controller, max 4
 RGB-Controller, 5-12 spotlights

5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.09.16	5.0635.09.50	5.0635.65.20

Constant Current power supply, max 1 spotlights
 Constant Current power supply, max 2 spotlights
 Constant Current power supply, 2-4 spotlights
 RGB-Controller, max 4
 RGB-Controller, 5-12 spotlights

5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.65.03	5.0635.65.10	5.0635.65.20
5.0635.09.16	5.0635.09.50	5.0635.65.20

Constant Current power supply, max 3 spotlights
 Constant Current power supply, 3-6 spotlights
 Constant Current power supply, 5-12 spotlights
 RGB-Controller, max 4
 RGB-Controller, 5-12 spotlights

NOTE



POW-LED, series-connected



Glass surface temperature below 40° (Cool Contact)

OPTIONS

Possible beam angle



marine grade 316L stainless steel housing on request