




SURFACE SPOTLIGHT 4.0086

UNDERWATER | EXTERIOR

IP68

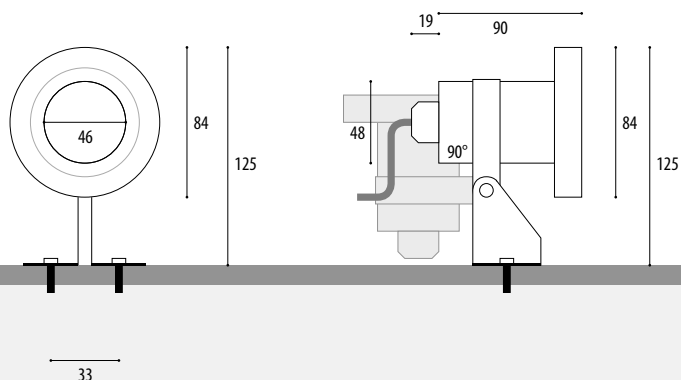

Article number	Lamps	Lumen	Light colour	Wattage	Current	Socket	Radation angle	Cable, installs	[V]
VERSIONS: UNDER- AND OVERWATER OPERATION (ACCORDING TO PRIOR AGREEMENT)									
POW-LED									
4.0086.00.14	3 POW-LED		yellow	total 5 W	CC 350 mA		30° medium	UW, 2x1,5 qmm	
4.0086.00.15	3 POW-LED		red	total 5 W	CC 350 mA		30° medium	UW, 2x1,5 qmm	
4.0086.00.16	3 POW-LED		blue	total 5 W	CC 350 mA		30° medium	UW, 2x1,5 qmm	
4.0086.00.17	3 POW-LED		green	total 5 W	CC 350 mA		30° medium	UW, 2x1,5 qmm	
4.0086.00.19	3 POW-LED		RGB	all on 5 W	CC 350 mA		30° medium		
QR-CB51									
4.0086.00.20	QR-CBC51	210	3000K	20W	12V-AC	GU5,3	36°	Si, 2x1,5 qmm	C22
4.0086.00.35	QR-CBC51	430	3000K	35W	12V-AC	GU5,3	36°	Si, 2x1,5 qmm	C33
VERSIONS: ONLY UNDERWATER OPERATION									
POW-LED									
4.0086.00.11	3 POW-LED	915 lm	6000K cold white	total 9 W	CC 700 mA		30° medium	UW, 2x1,5 qmm	W33
4.0086.00.12	3 POW-LED	750 lm	3000K warm white	total 9 W	CC 700 mA		30° medium	UW, 2x1,5 qmm	W33
4.0086.00.13	3 POW-LED	855 lm	4500K neutral white	total 9 W	CC 700 mA		30° medium	UW, 2x1,5 qmm	
4.0086.00.39	3 POW-LED		RGB	all on 9 W	CC 700 mA		30° medium	Si, 6x0,5 qmm	
QR-CB51									
4.0086.00.50	QR-CBC51	680	3000K	50W	12V-AC	GU5,3	36°	Si, 2x1,5 qmm	C43
4.0086.00.75	QR-CBC51		3000K	75W	12V-AC	GU5,3	60°	Si, 2x1,5 qmm	C53
QPAR16									
4.0086.00.51	QPAR16			35W	230V	GU10	35°	Si, 3x1,5 qmm	G11
4.0086.00.52	QPAR16			50W	230V	GU10	35°	Si, 3x1,5 qmm	G12



4.0086 | SURFACE-MOUNTED SPOTLIGHT

FOR ILLUMINATING AND ACCENTUATING OF FOUNTAINS, WATER FEATURES, BUILDINGS AND EXTERIOR AREAS.



CENTUM[®] Updated version available: 4.0100 – Page 44

IP68

STAINLESS
STEEL V4A
1.4571
316Ti

POW-LED
INCL.

3.000 K
4.500 K
6.000 K
COLOR

RGB

CONSTANT
CURRENT
KONSTANT
STROM

CABLE
INCL.

DALI
1-10 V
OPTIONAL
DIMM

max 3m



- Protection class IP68 – up to 3m water depth
- Entirely made of stainless steel 316Ti 1.4571
- Mounting foot adjustable through 90°
- ...
- POW-LED cold white, warm white, neutral white
- POW-LED cored
- POW-LED RGB
- operating mode: constant current
- Low voltage halogen QR-CB51 ES 12 V-AC
- High voltage QPAR16
- ...
- Cable gland PG11, marine grade 316Ti stainless steel
- Temperature-resistant silicon seal
- Toughened safety glass
- Supplied with light source and cable (3 m) already connected

Power supplies Technical details see from page 234.

5.0635.65.03		5.0635.65.10		5.0635.65.20	
5.0635.65.03	Constant Current power supply, max 1 spotlights	5.0635.65.10	Constant Current power supply, max 2 spotlights	5.0635.65.20	Constant Current power supply, 2-4 spotlights
5.0635.65.03		5.0635.65.10		5.0635.65.20	

5.0635.09.16 RGB-Controller, max 4 spotlights

5.0098.00.00 Transformer, max 1 spotlights

5.0098.00.00 Transformer, max 1 spotlights

5.0670.65.10 Constant Current power supply, max 1 spotlights

5.0670.09.18 RGB-Controller, max 6 spotlights

5.0098.00.00 Transformer, max 1 spotlights

5.0100.00.00 Transformer, max 1 spotlights

NOTE



POW-LED montées en série

OPTIONS

Possible beam angle POW-LED

10°



30°



45°



90°



Possible beam angle HALOGENE

10°



24°



36°



60°



+ ADDITIONAL PARTS



colour filter, dichroitic, for halogene
4.0081.04.00 yellow 4.0081.06.00 blue
4.0081.05.00 red 4.0081.07.00 green



spike
280 mm
4.0086.50.00